


- NOTES**
1. ALL DIMENSIONS ARE IN MILLIMETRES.
 2. Posts are to be located 300 to 400 outside of hardshoulder/hardstrip.
 3. Posts are to be spaced at 100m intervals along the Motorway.
 4. Type 3 posts to replace Type 1 posts on both approaches to emergency crossing point.
 5. Post faces are to be white except when shown otherwise
 6. Posts are to have PVC closed or capped tops.
 7. Type 3 post (as shown) to be fixed 300m from centre of crossing. Similar post but with lowest disc omitted to be fixed 200m from centre of crossing and a further post but with the lowest two discs omitted to be < 100m from the crossing point.
 8. See Drawing No. E3 for details of telephone symbol and arrow.
 9. See Drawing No. E2 for post and socket section details.

HIGHWAY CONSTRUCTION DETAILS	DISTANCE MARKER POSTS			GROUND SOCKET MOUNTED POSTS TYPES 1, 2 AND 3	Drawing No.
		A	DEC 91		E1
		Issue	Date		

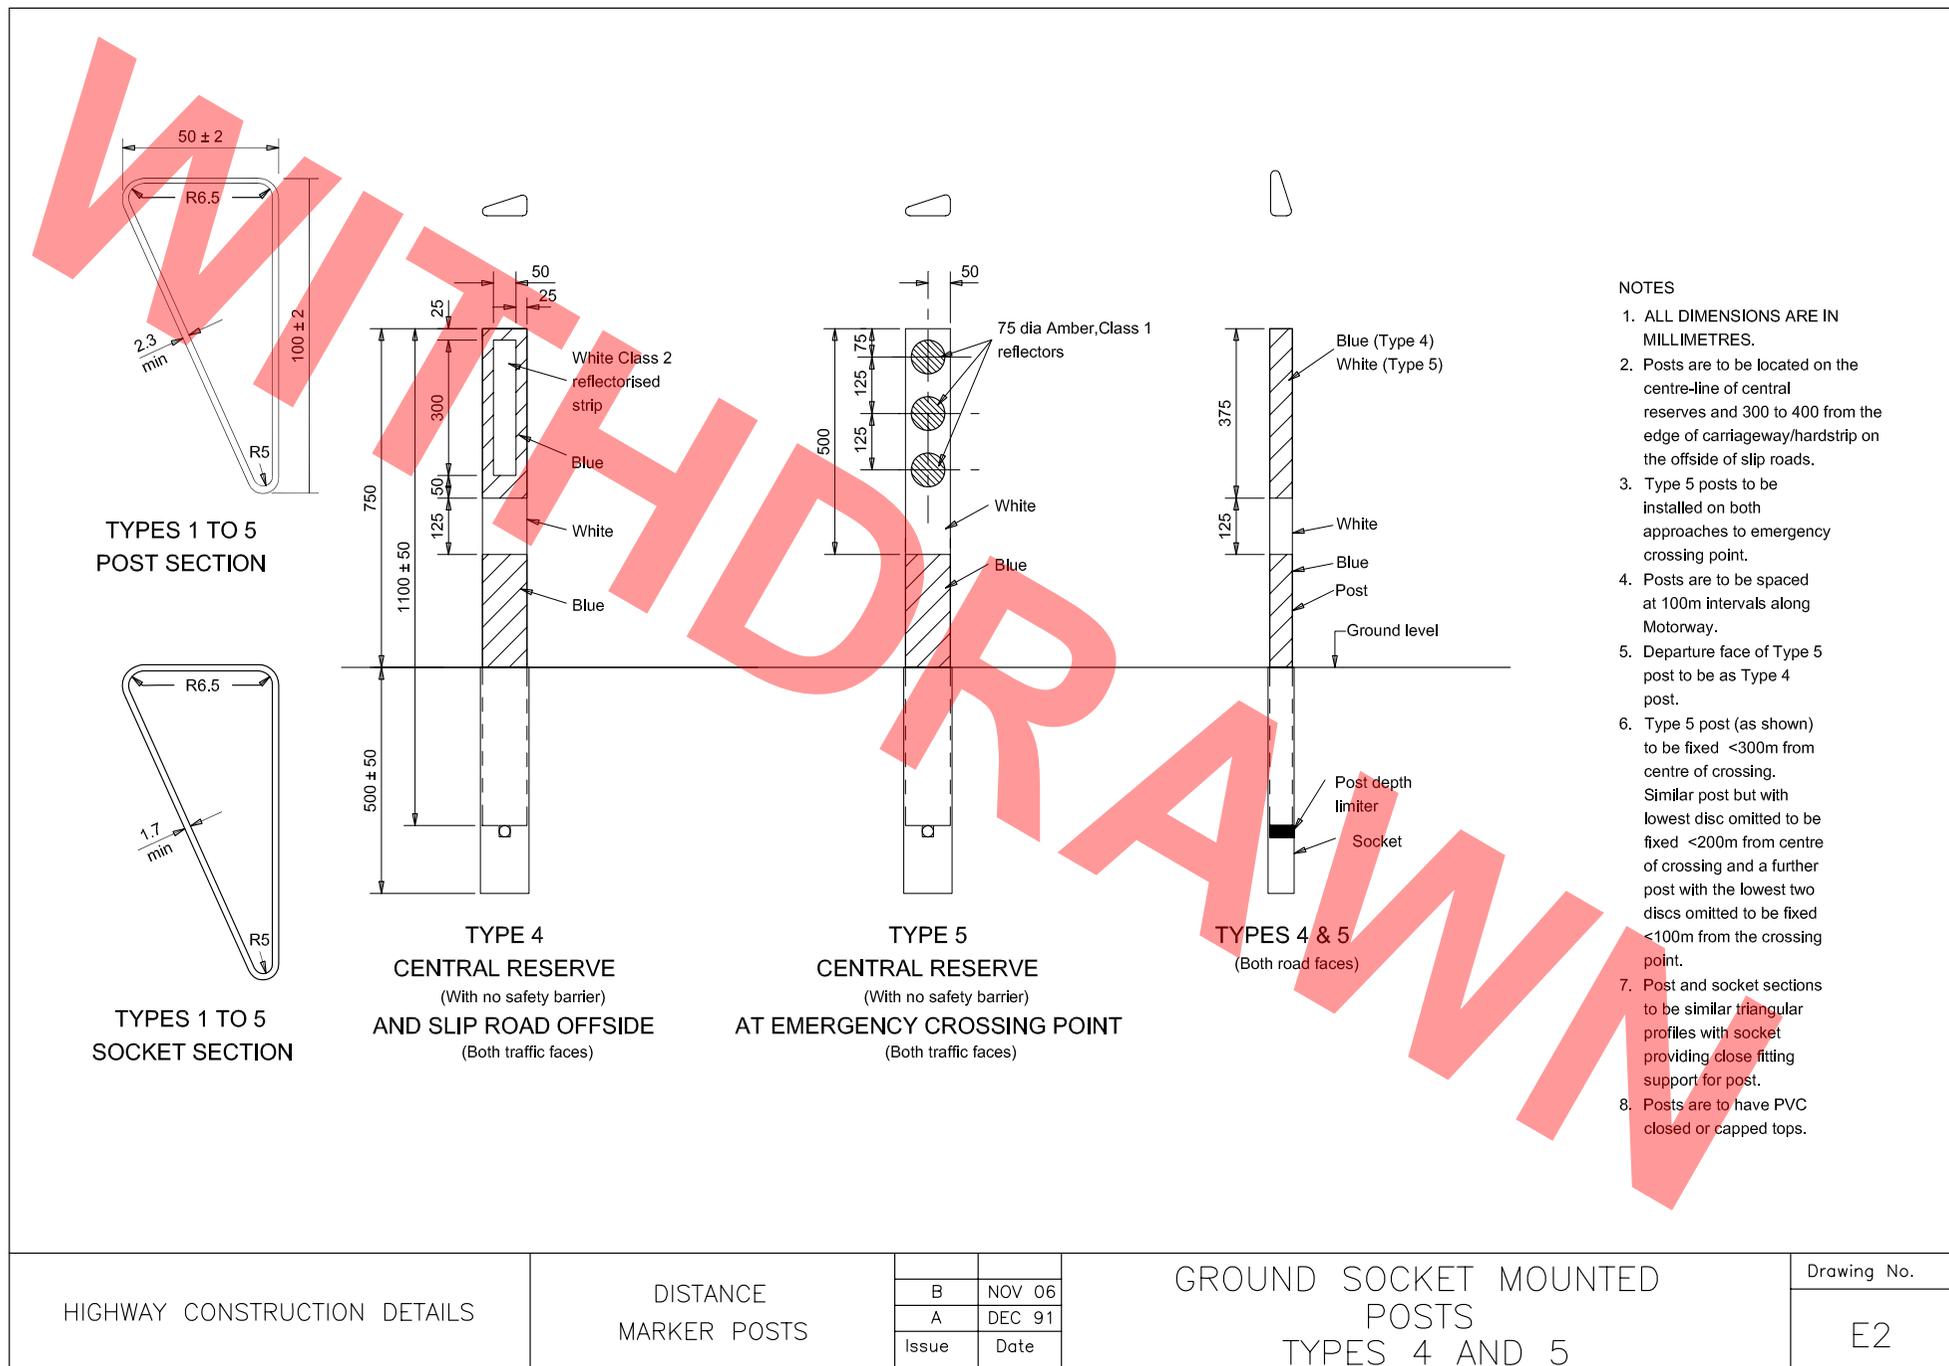

HIGHWAY CONSTRUCTION DETAILS


DISTANCE
MARKER POSTS

B	NOV 06
A	DEC 91
Issue	Date

GROUND SOCKET MOUNTED
POSTS
TYPES 4 AND 5

Drawing No.

E2

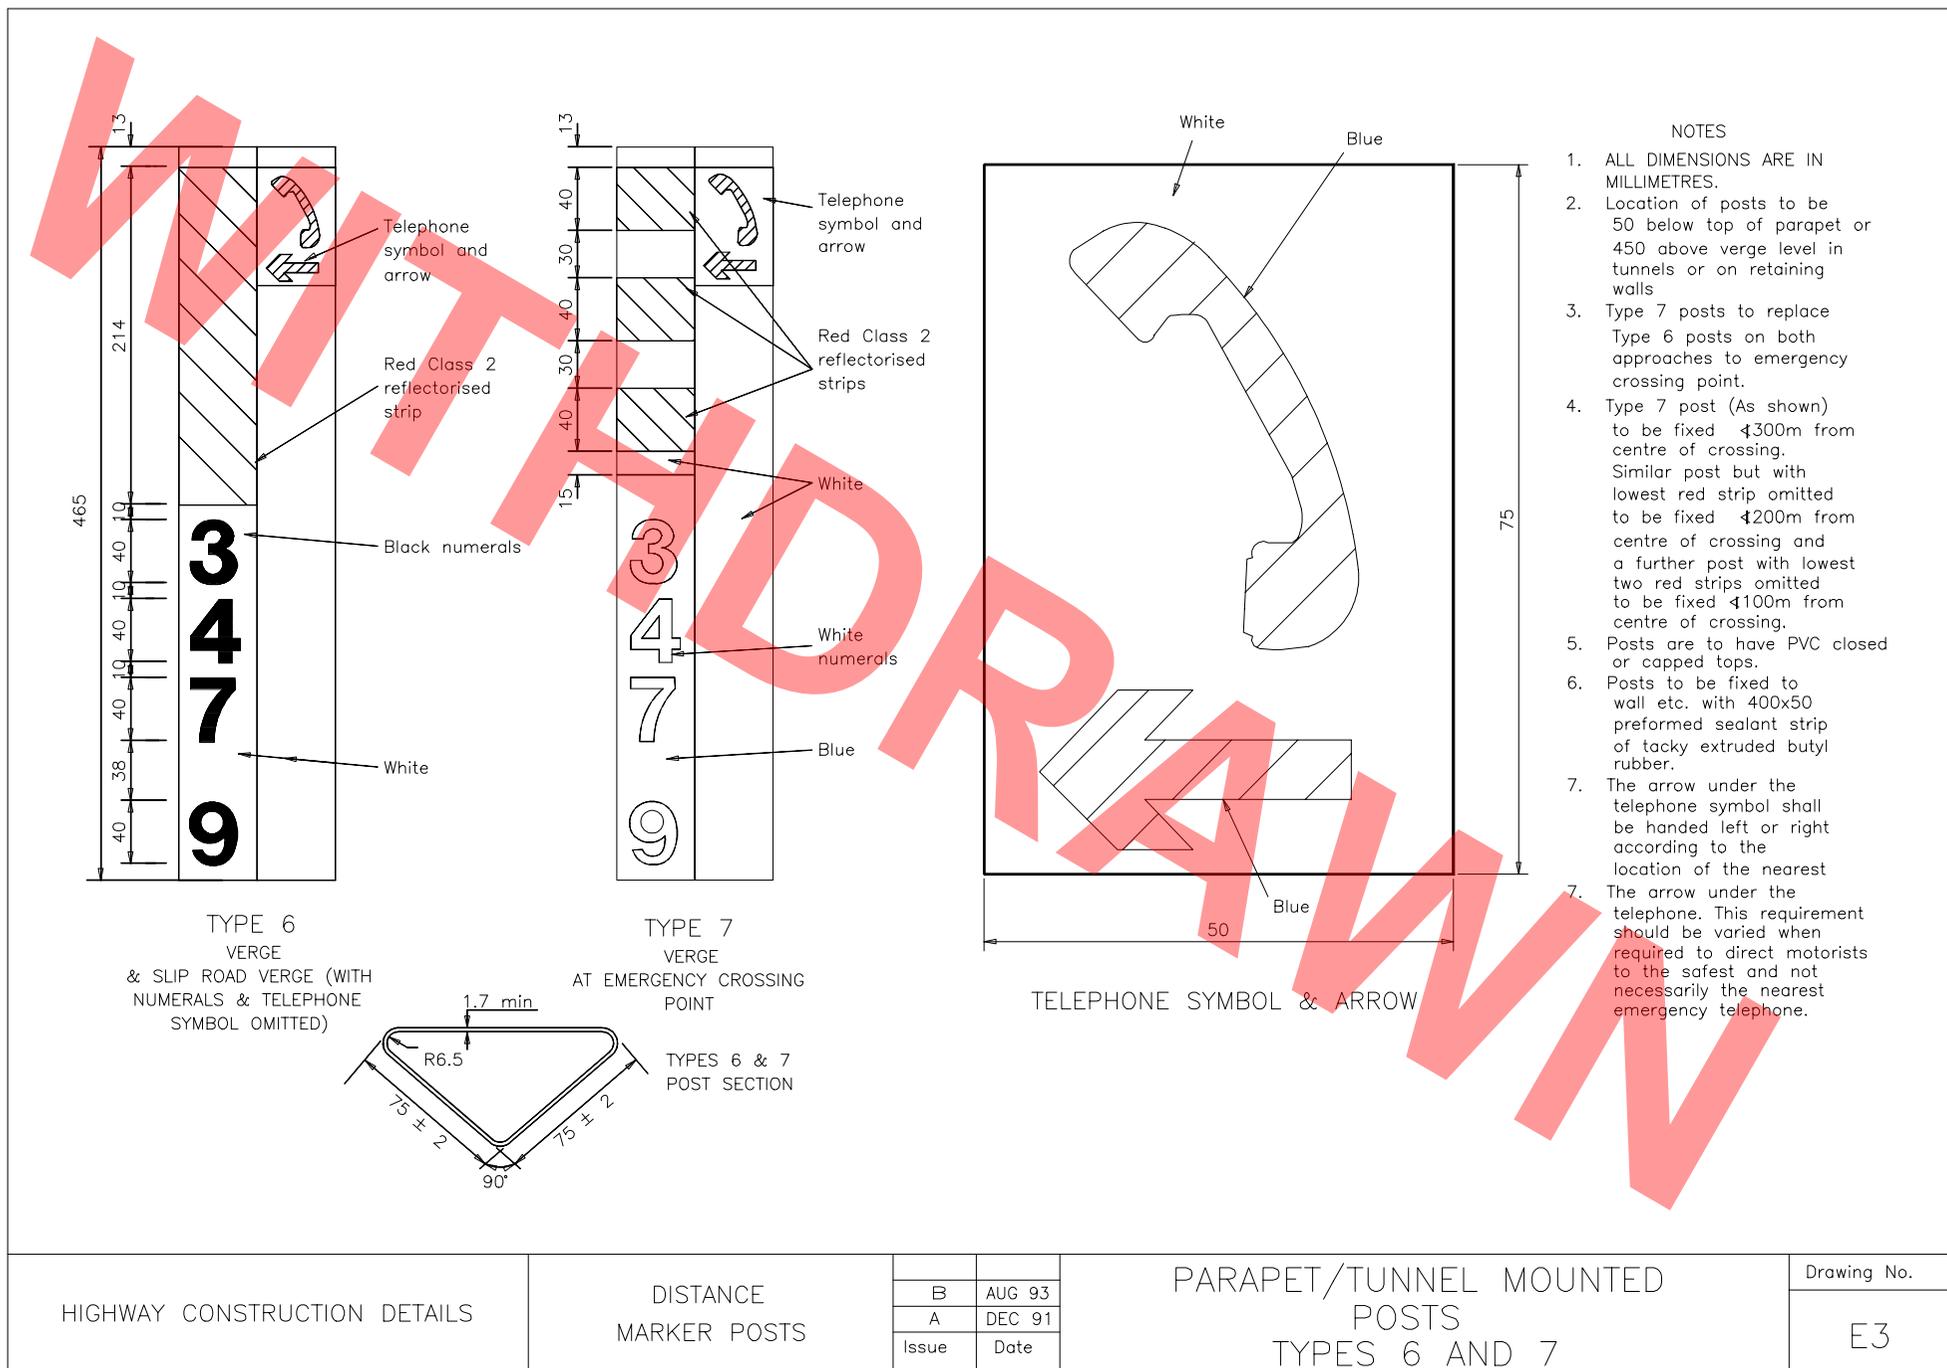

HIGHWAY CONSTRUCTION DETAILS


DISTANCE
MARKER POSTS

B	AUG 93
A	DEC 91
Issue	Date


PARAPET/TUNNEL MOUNTED
POSTS
TYPES 6 AND 7

Drawing No.

E3

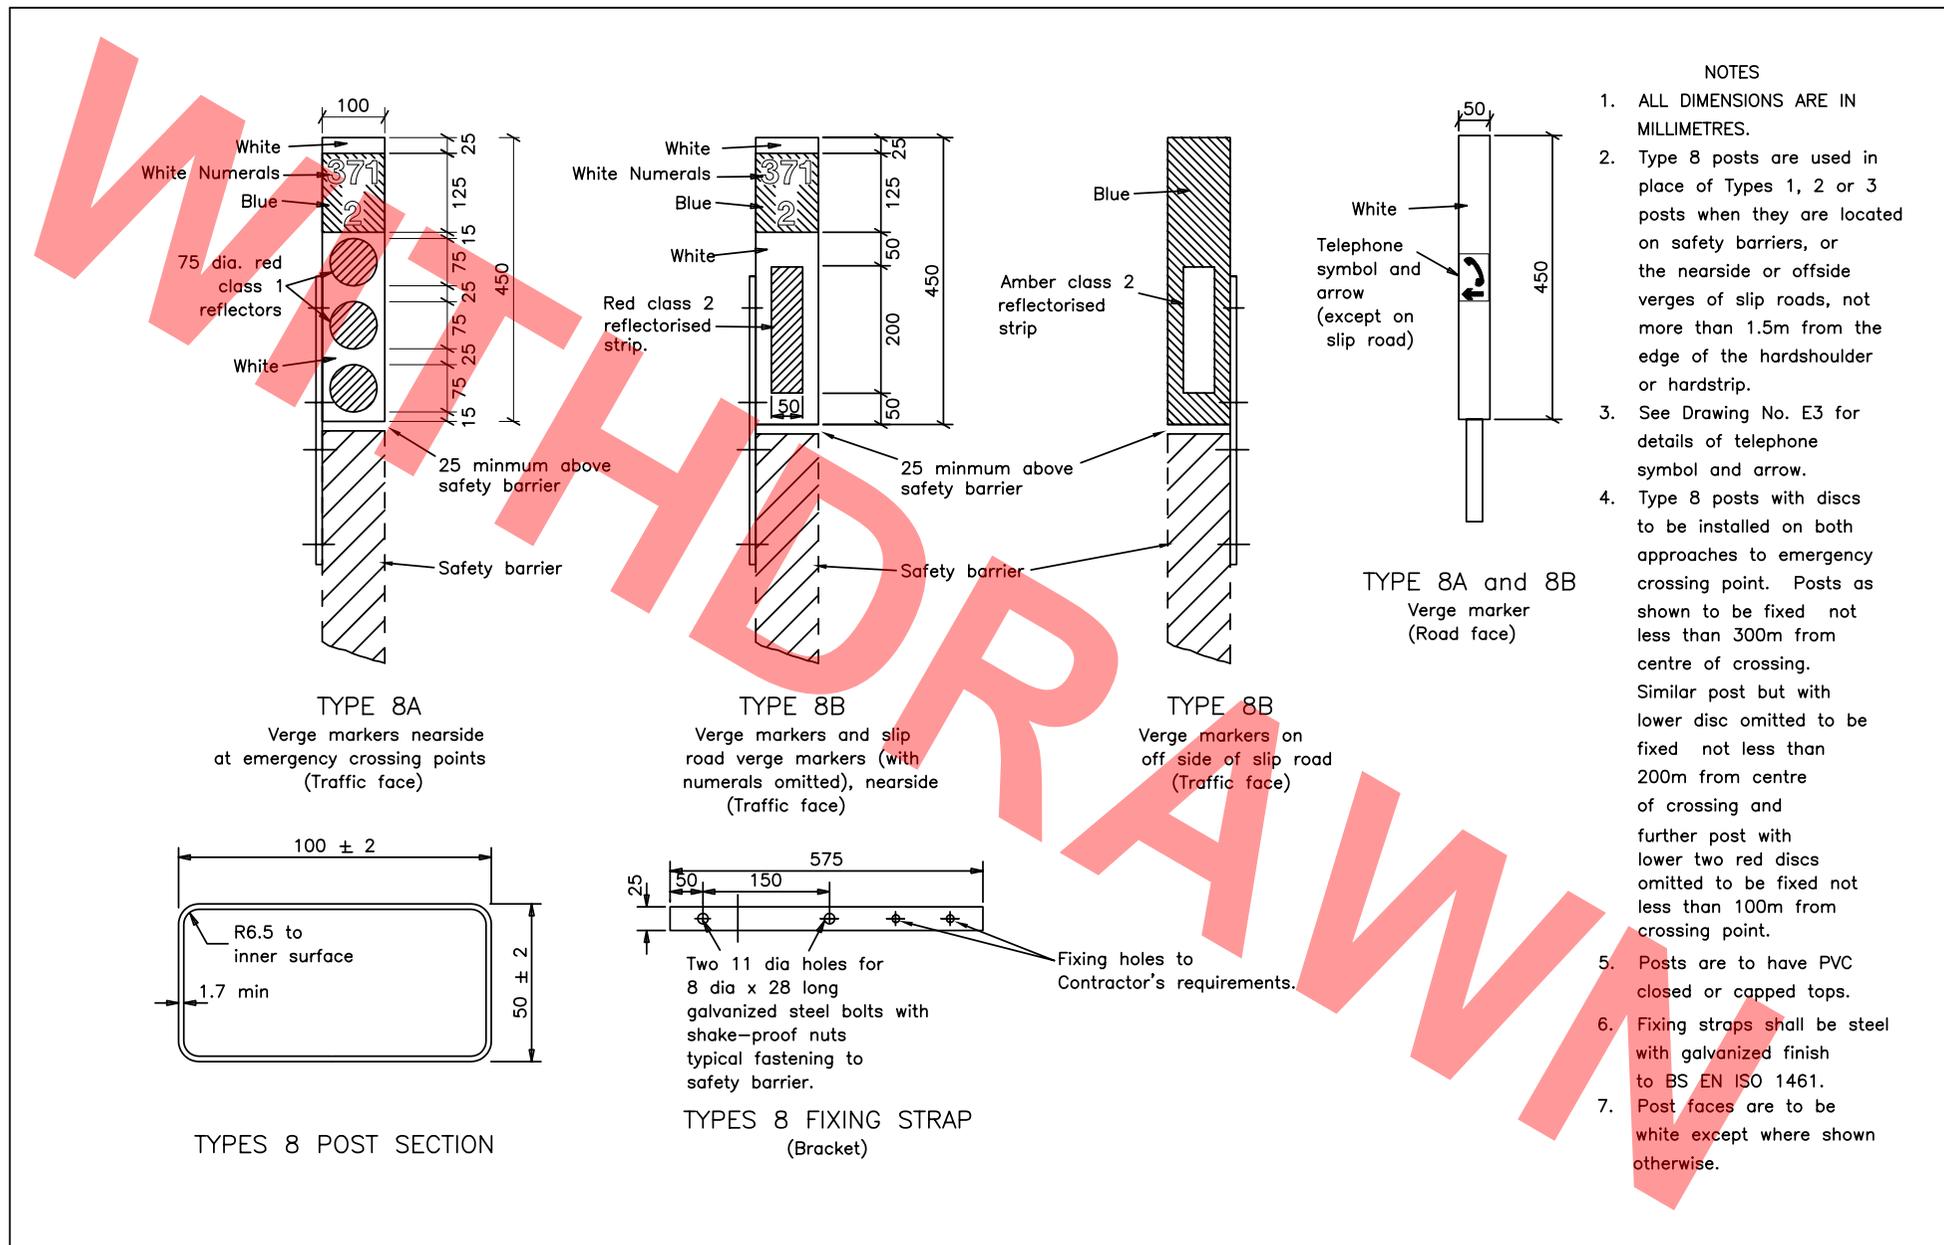

HIGHWAY CONSTRUCTION DETAILS	DISTANCE MARKER POSTS	B	MAY 04	SAFETY BARRIER MOUNTED REFLECTORS TYPE 8	Drawing No.
		A	DEC 91		E4
		Issue	Date		

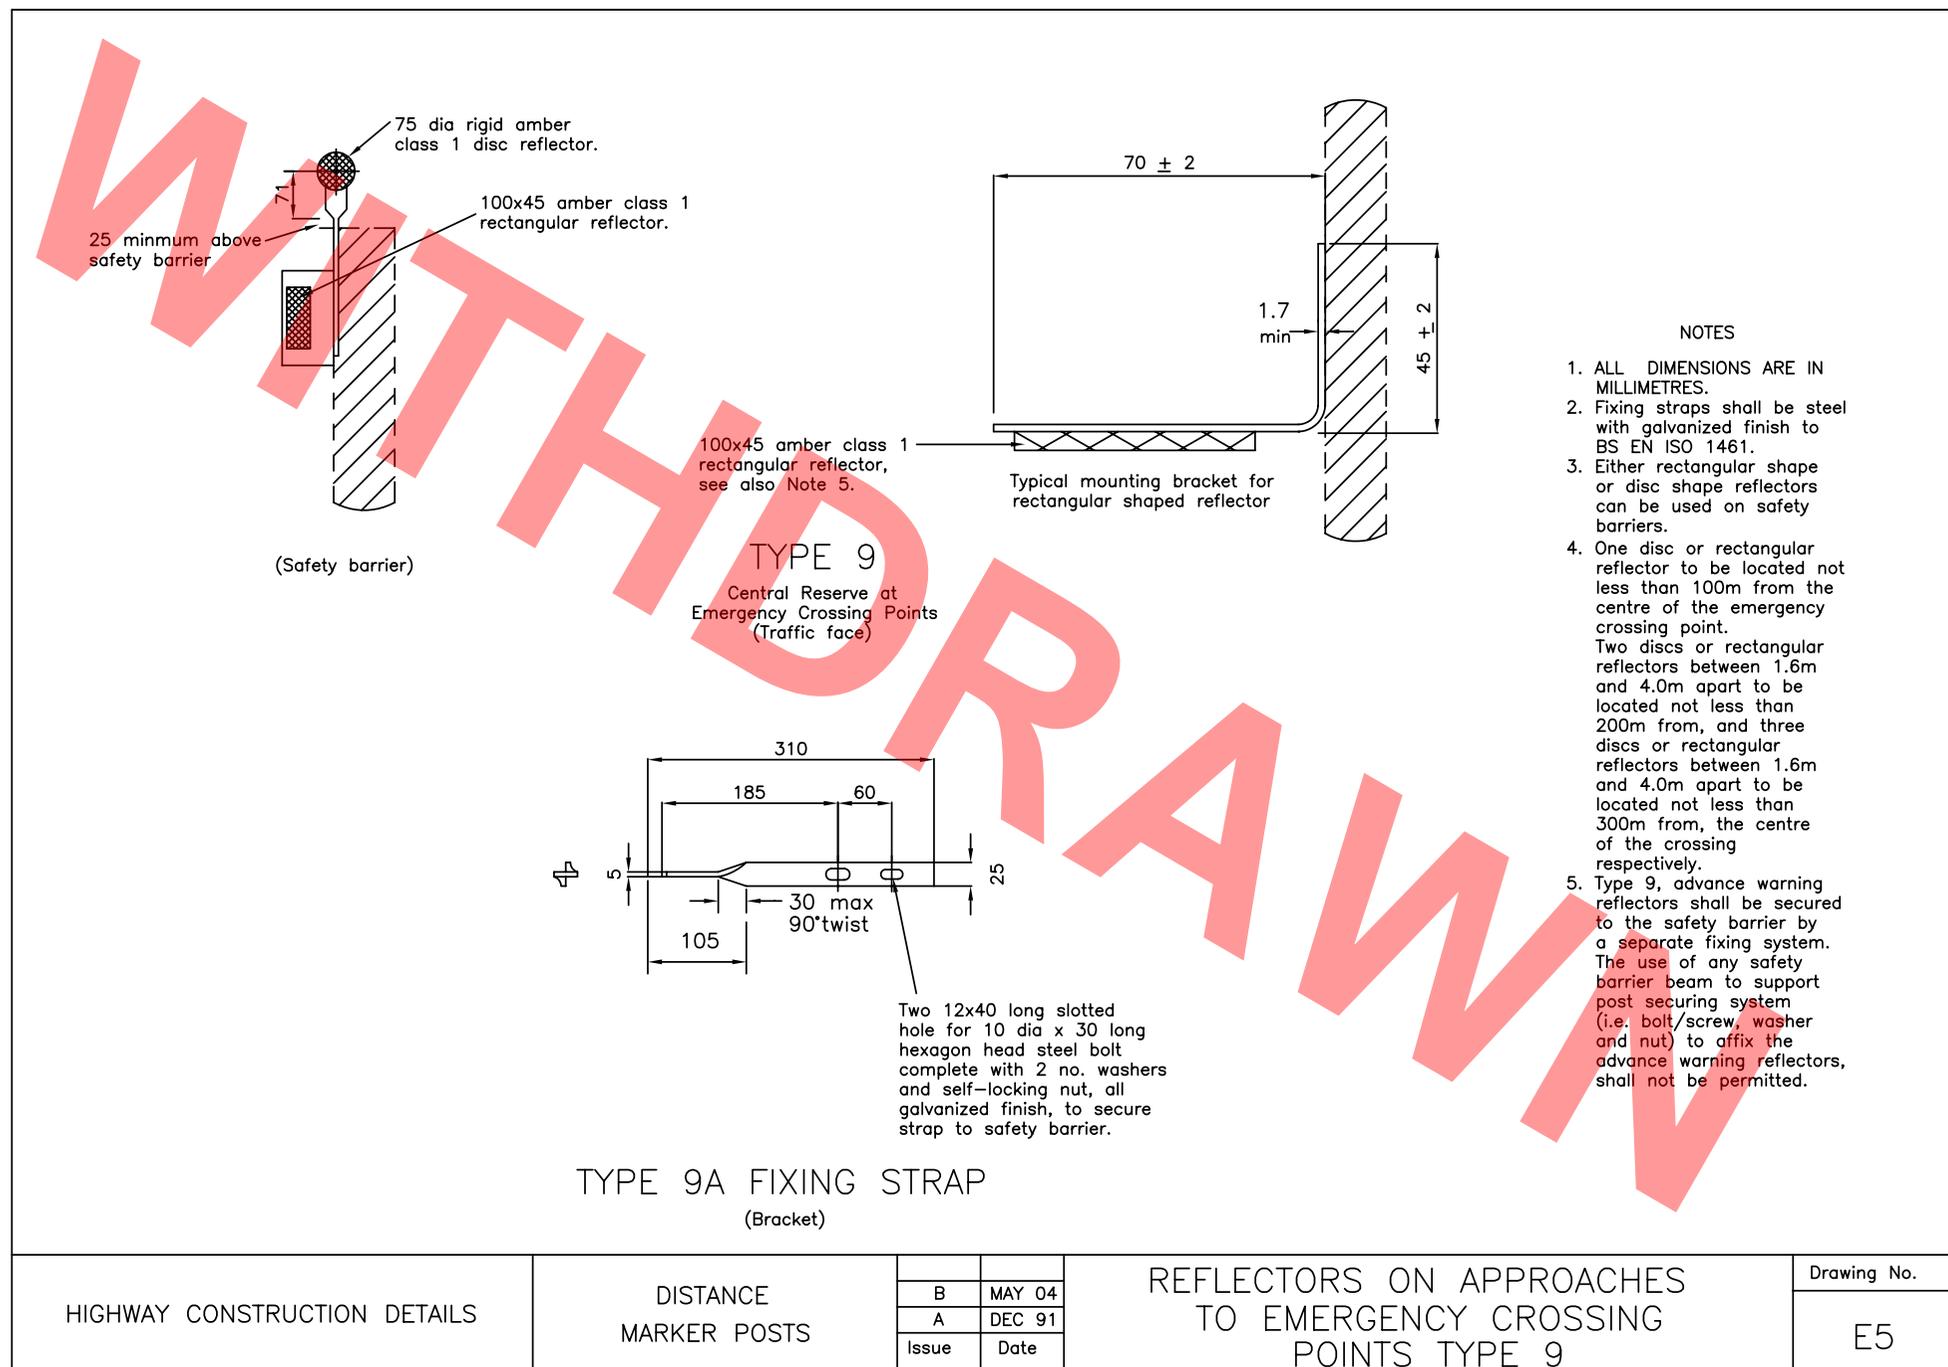

HIGHWAY CONSTRUCTION DETAILS

DISTANCE
MARKER POSTS

B	MAY 04
A	DEC 91
Issue	Date

REFLECTORS ON APPROACHES
TO EMERGENCY CROSSING
POINTS TYPE 9

Drawing No.

E5